


Specialize In Wire Conveyor Belt Manufacturing And Solution.

Flexible Rod Conveyor Belts with Link in The Middle Enquiry Form

Please supply the following technical parameter information of your belt in order to obtain further quotation, if cannot confirm, please contact us by email in time.

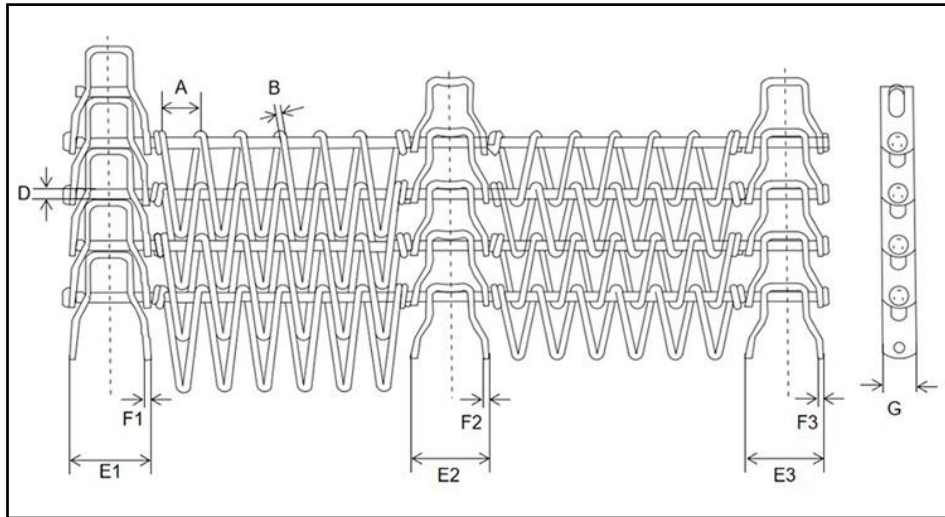

NOTE: When measuring pitches A & C, it is best practice to measure over 10 pitches and divide by 10 to obtain the average pitch.

Basic information		
Material	Overall Width (mm)	Length (m)

Detailed information					
A: Spiral Coil Pitch (mm)				E: Width of Edge Links (mm)	E1: E2: E3:
B: Coil Wire Diameter (mm)				F: Edge Link Thickness (mm)	F1: F2: F3:
C: Cross Rod Pitch (mm)	C1: C2: C3:			G: Edge Links Height (mm)	
D: Cross Rod Diameter (mm)				Side Flexing Inside Edge Turn Radius (mm)	

Please fill in your more demand information here: