

OPTIONAL TECHNICAL SHEET

Balanced Woven Belt with Chain Edge

Fill in what you know; leave the rest blank. You can also start an enquiry with photos only.


01 Belt size & material

Total belt length (m)

Mesh & cross rod material

Chain edge material

02 Mesh dimensions

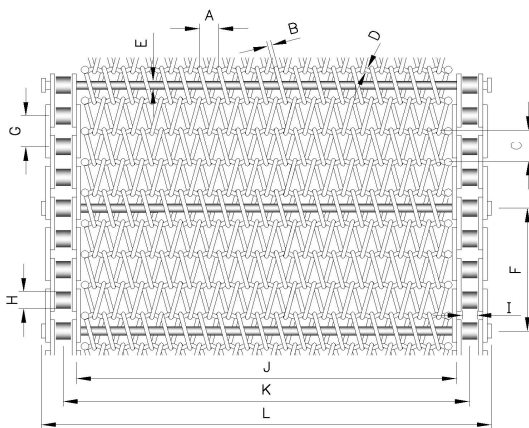

A Coil pitch (mm)

B Coil wire diameter (mm)

C Crimped cross wire pitch (mm)

D Crimped cross wire diameter (mm)

E Cross rod diameter (mm)

F Cross rod pitch (mm)

G Chain pitch (mm)

H Chain roller dia. (mm)

I Inside chain width (mm)

J Width between chains / mesh width (mm)

K Chain centres (mm)


L Overall width (mm)

For A and C, measure over 10 pitches where practical and divide by 10.

Coil wire profile

Flat wire cross section W x T (mm)

03 Edge finish



Welded washer



Cotter pin & washer

Cross rod end fixing

Select one option. If unsure, send a close-up photo of the cross rod end and side-chain connection.

04 Drive Method



Chain Edge Drive

Sprockets drive the side chains; the mesh carries the product. Match chain pitch, sprockets and cross rod assembly.

Side-chain style

Large coil at cross rod?

Chain / drive sprocket markings or stamps

05 Belt options (optional)

☐ Edge plates

Please provide the height, material and quantity of edge plates, plus a drawing or sketch.

☐ Flights

Please provide a drawing or sketch of the desired flight.

06 Application (optional)

Product

Minimum temperature (°C)

Process

Maximum temperature (°C)

Other / further info

Length = full loop. Send this PDF with photos or drawings.