

OPTIONAL TECHNICAL SHEET

Flexible Rod Conveyor Belt

Fill in what you know; leave the rest blank. Photos alone are enough to start an enquiry.



01 Belt size & material

Overall width (mm)

Total belt length (m)

Material / grade

02 Belt & link dimensions

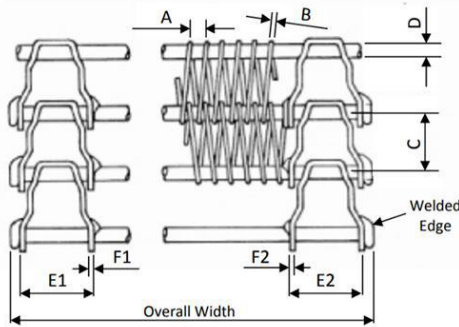

A Spiral coil pitch (mm)

B Coil wire dia. (mm)

C Cross rod pitch (mm)

D Cross rod dia. (mm)

A and B: mesh-covered belts only.

E = link width; F = link thickness; G = link height. Record each edge separately (1 / 2).

E1 Width (mm)

E2 Width (mm)

F1 Thick. (mm)

F2 Thick. (mm)


G1 Height (mm)

G2 Height (mm)

For A and C, measure over 10 pitches where practical and divide by 10. Check worn samples against nominal dimensions.

03 Construction

Mesh overlay



Standard balanced weave

Unilateral weave

Rod-end welding style



Bridge-tension weld

360° buttonless weld

Button cap weld

Edge-link configuration



Standard U-shaped links

Guard edge links

Select...

Select...

Select...

04 Conveyor layout

Belt operation

Select...

Inside turn radius (mm)

Cage diameter (mm)

Product

Belt speed (m/min)

Minimum temperature (°C)

Process

Load (kg/m of loaded belt)

Maximum temperature (°C)

Other conditions: cleaning, side guards, quantity or equipment details

Length = full loop. For an additional center link, use the Center-Link Enquiry Form. Attach photos or drawings.