www.industrialconveyorbelt.com
wirebelt@pfmscreen.com
WhatsApp +86-153-6967-9157

ENQUIRY FORM 2026 / OPTIONAL TECHNICAL SHEET

# Veneer Dryer Wire Mesh Belt

Fill in what you know; leave the rest blank. You can also start an enquiry with photos only.

## 01 Belt size & material

Overall width (mm)

Total belt length (m)

Material / grade: Select...

Width includes both finished edges; maximum 3,500.00 mm. Length = full belt circuit.

## 02 Mesh dimensions & wire profile

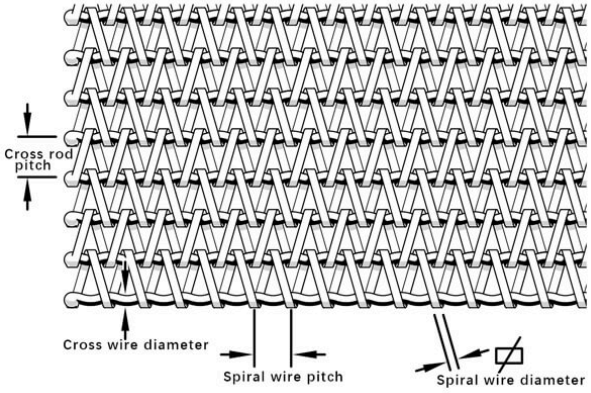


Spiral wire profile: Select...

Flat wire W x T (mm)

Spiral wire pitch (mm)

Spiral wire diameter (mm)

Cross rod pitch (mm)

Cross wire diameter (mm)

Flat wire: enter width x thickness, not diameter.

Spiral wire and cross rod pitches are not clear openings. Measure 10 pitches and divide by 10 if practical.

## 03 Edge finish



**Welded**



**Laddered**



**Hook**



**Laddered and welded**

Edge finish: Select...

Side edges; the belt joint is specified below.

## 04 Installation & application (optional)

Belt position: Select...

Normal temperature (°C)

Maximum zone temperature (°C)

Dryer model / deck / quantity

Veneer species / thickness (mm)

Other requirements / cleaning / chain details (if fitted)

Normally supplied open-ended with prepared connecting cross rods; rod ends are welded at installation.
Attach mesh, edge and joint photos. For chain-reinforced flat-wire belts, include chain and attachment drawings.