www.industrialconveyorbelt.com
wirebelt@pfmscreen.com
WhatsApp +86-153-6967-9157

OPTIONAL TECHNICAL SHEET

Woven Rod Bar Conveyor Belts

Fill in what you know; leave the rest blank. You can also start an enquiry with photos only.

01 Belt size & material

Overall width (mm)

Available up to 3,500.00 mm wide.

Total belt length (m)

Length = full loop.

Material / grade

e.g. stainless steel 304 / 316

02 Mesh dimensions

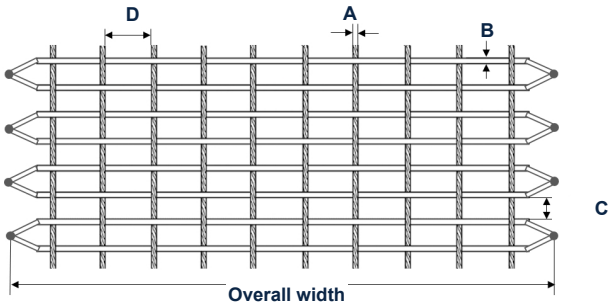

Schematic: 1 cable per group shown; not to scale.

A Warp cable dia. (mm)

Standard: 0.70-1.20 mm

B Weft wire dia. (mm)

Standard: 1.50-2.50 mm

C Weft clear gap (mm)

Standard: 1.00-3.00 mm

D Group clear gap (mm)

Standard: 8.00-24.00 mm

A = full stranded cable outside diameter.

C / D = clear gaps, not centre pitches.

03 Warp cable arrangement



1 cable / group

2 cables / group



3 cables / group

4 cables / group

Parallel cables per group

Select...

Not the total across the belt, or strands within one cable.

04 Edge finish



Welded - 2 wires



Welded - 3 wires

Cut Edge also available; select the required finish.

Select...

05 Joining method



Pin Joint
(preferred)



Endless Seam



Mechanical Fastener Joint

Select...

06 Application (optional)

Product

Process

Minimum temperature (°C)

Maximum temperature (°C)

Other conditions

Continuous operation up to 400°C. Higher temperatures require customised raw materials.

☐ Product-specific food-contact conformity documents required

Send this form with photos or drawings.